


capital SALA PROTECTA

## New Developments in Fall Protection

© 2007 Capital Safety



---

---

---

---

---

---

---


---

capital SALA PROTECTA

## Fall protection is a serious business

- **79,280 falls** with reported injuries in 2004
- Falls caused **854 U.S. workplace deaths** in 2004
- Falls are the **#1 cause of workplace death** in the construction industry
- OSHA ranks improper fall protection as the **#2 most serious workplace safety violation**
- Falls account for more than **20% of the total cost of occupational injuries**

© 2007 Capital Safety



---

---

---

---

---

---

---

---


capital SALA PROTECTA

## Economics of Fall Protection

### Workman's Compensation

- **\$88 million per week in Workers Comp** is paid out due to falls to lower level

© 2007 Capital Safety



---

---

---

---

---

---

---

---

capital SAFETY SALVA PROTECTA

### 2005 OSHA Violations

1. Scaffolding = 8,130 violations
2. Hazard Communication = 6,641 violations.
- 3. Fall Protection = 5,504 violations**
4. Respiratory Protection -- 3,904 violations
5. Lockout/Tagout -- 3,711 violations

---

---

---


---

---

---

---

---

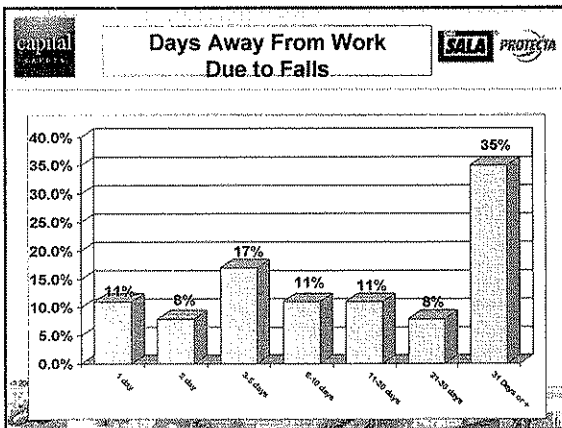


---

---

---


---

---

---

---

---

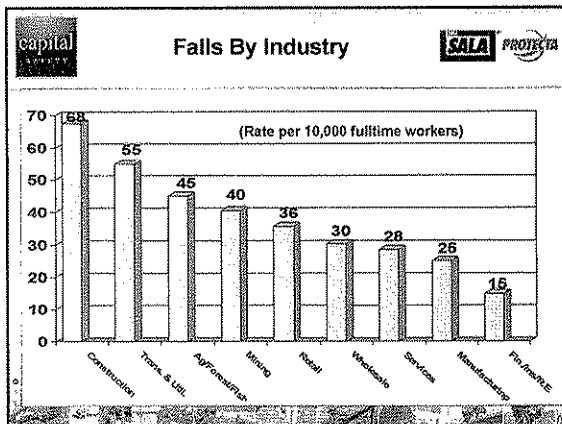


---

---

---

---

---

---

---

---



**capital** **A,B,C,D's** **SALA PROTECTA**

- A – Anchorage
- B - Body Support
- C – Connectors
- D – Descent and Rescue

**capital SAFETY** **DBI SALA PROTECTA** **UC SAFETY SYSTEMS**

© 2007 Capital Safety

---

---

---

---

---

---

---

---

**capital** **Anchorage** **SALA PROTECTA**

## ANCHORS

A – Anchorage – 1926.502 and 1910.66  
 Must be able to support 5000 lbs per employee attached or as a part of a complete fall arrest system which maintains a safety factor of two

© 2007 Capital Safety

---

---

---

---

---

---

---

---

**capital** **Commonly Used Anchors** **SALA PROTECTA**

**Concrete Anchors** **I-beam Anchors**

© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY

**Wrap Around Anchors**

SALA PROTECTA

© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY

**Engineered Systems  
Unique Anchorage**

SALA PROTECTA

- Fall Protection On Vehicles

© 2007 Capital Safety

SAFETY Fall Truck Application-Moving

---

---

---

---

---

---

---

---

capital SAFETY

**Powered Tag Line**

SALA PROTECTA

- Solution to Crane issue
- Brings down retractable to worker with remote

© 2007 Capital Safety

---

---

---

---


---

---

---

---

capital SAFETY **Unique Anchors** SALA PROTECTA

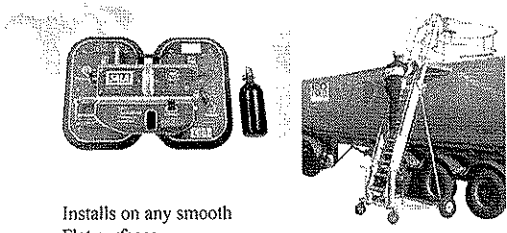

Installs on any smooth Flat surfaces

Tanker / Fuel Trucks

© 2007 Capital Safety

---

---

---

---

---


---

---

---

capital SAFETY **Wood Roof Anchors** SALA PROTECTA

- 1926.501 (B)(13) – Residential Construction
- On pitches from 4:12 to 8:12 and under 25 feet, slide guards can be used
- See STD 3.01A
- EXCEPTION

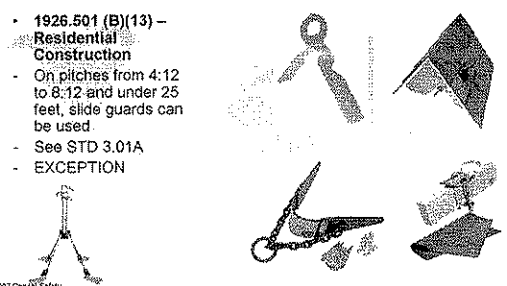

© 2007 Capital Safety

---

---

---

---


---

---

---

---

capital SAFETY **Metal Deck Roof Anchors** SALA PROTECTA

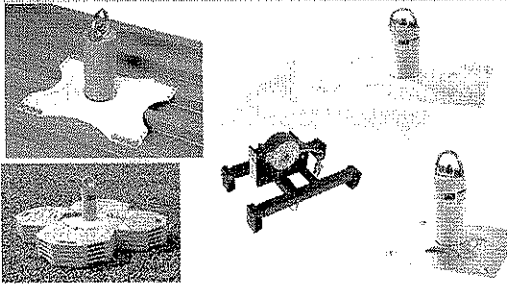

© 2007 Capital Safety

---

---

---

---

---

---

---

---

**capital SAFETY** **Portable Systems** **SALA PROTECTA**

© 2007 Capital Safety

**SAFETY SYSTEM**

---

---

---

---

---

---

---

---

---

---

---

---

**capital SAFETY** **Other Anchors** **SALA PROTECTA**

Many other anchors available

© 2007 Capital Safety

---

---

---

---

---

---

---

---

---

---

---

---

**capital SAFETY** **Confined Spaces** **SALA PROTECTA**

**OSHA 1910.146**

(a) Scope and application. This section contains requirements for practices and procedures to protect employees in general industry from the hazards of entry into permit-required confined spaces.

(k)(3) To facilitate non-entry rescue, retrieval systems or methods shall be used whenever an authorized entrant enters a permit space, unless the retrieval equipment would increase the overall risk of entry or would not contribute to the rescue of the entrant. Retrieval systems shall meet the following requirements: (i) Each authorized entrant shall use a chest or full body harness, with a retrieval line attached at the center of the entrant's back near shoulder-level, above the entrant's head or at another point which the employer can establish presents a profile small enough for the successful removal of the entrant. Wristlets may be used in lieu of the chest or full body harness if the employer can demonstrate that the use of a chest or full body harness is infeasible or creates a greater hazard and that the use of wristlets is the safest and most effective alternative. (ii) The other end of the retrieval line shall be attached to a mechanical device or fixed point outside of the permit space in such a manner that rescue can begin as soon as the rescuer becomes aware that rescue is necessary. A mechanical device shall be available to retrieve personnel from vertical type permit spaces more than 5 feet deep.

© 2007 Capital Safety

---

---

---

---

---

---

---

---

---

---

---

---

capital SAFETY **SAFA** PROTECTA

**Confined Space**

- **CONFINED SPACE SOLUTIONS**
- Side Entry
- Vehicle Hitch Mount
- Barrel Mount
- Replacements to Tripods

© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY **SAFA** PROTECTA

<http://www.youtube.com/watch?v=Tlejxn5k55M>

## Harnesses

B – Body Support  
 1926.502 and 1910.66 – “... When stopping a fall, shall limit MAF on an employee to 1,800 lbs... be rigged such that an employee can neither free-fall more than 6-feet, not contact any lower level

© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY **SAFA** PROTECTA

- **Comfort & Ergonomics**
- **Delta and Exofit XP – Construction and Industrial**
- **Economical Harnesses**
- **Work Over Rig Harness – Oilfield**
- **Resist Technology - Dirty**
- **Kevlar Harnesses - Welders**
- **Suspension Trauma Issue**

© 2007 Capital Safety

---

---

---

---

---

---


---

---

**capital** **SALA PROTECTA**

**New Developments**  
**Soft goods**

- **Comfort and Wearability continues to increase in Customer Expectations**

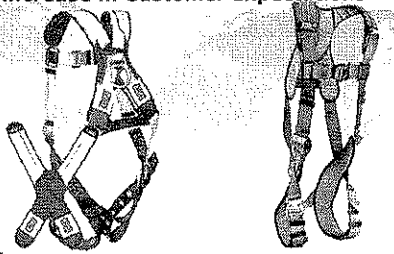

© 2007 Capital Safety

---

---

---

---

---

---


---

---

**capital** **SALA PROTECTA**

**Suspension Trauma Strap**

- **Helps prevent the effects of suspension trauma after a fall**
- **Easy deployment in a compact, lightweight device**
- **Fits most harness brands and styles**



© 2007 Capital Safety

---

---

---

---

---

---

---

---

**capital** **SALA PROTECTA**

**Self Retracting Lifelines**

© 2007 Capital Safety

---

---

---

---

---

---


---

---

**capital** **SAFETY** **Self Retracting Lifelines** **SALA** **PROTECTA**

**SRL-what is it and what can it do for me?**

- Self Retracting Lifeline (SRL) provides fall protection for personnel
- Allows mobility with a tensioned line
  - Line stays taut as you move about
  - If fall occurs, SRL activates and stops fall
- In the event of a fall, the key advantages of an SRL are:
  - Reduced fall distance- 42 inches (107 cm) maximum
  - Reduced arresting forces- typically 900 lbs. (4 KN) or less



© 2007 Capital Safety

---

---

---

---

---

---

---

---

---

---


---

---

**capital** **SAFETY** **Self Retracting Lifelines** **SALA** **PROTECTA**

**Key Usage Guidelines**

- Inspection/ servicing requirements
  - Before each use- end user inspection
  - Annually- by competent person
- Fall clearances- allow at least 6 ft. (1.8 m) below you
- Swing falls- be aware of pendulum type falls and the added clearance it will require
- Anchoring- use rated carabiner or approved connector attached in swivel eye
- Anchorage strength requirements- for fall arrest use 5,000 lb. (22.2 Kn) anchor or one that will provide at least a 2:1 safety factor when classified as an engineered system. Ref. OSHA and ANSI standards



© 2007 Capital Safety

---

---

---

---

---

---

---

---

---

---


---

---

**capital** **SAFETY** **Ultra-Lok® SRL** **SALA** **PROTECTA**

**Key Features/ Benefits**

- Durable housing design
- Wide variety of lifeline types for many different applications
- Anti-ratcheting brake design with reserve lifeline system
- Wide variety of lifeline lengths
- Bracket compatible



© 2007 Capital Safety

---

---

---

---

---

---

---

---

---

---

---


---



**capital SAFETY** **Ultra-Lok® SRL** **SALA PROTECTA**

**Optional Lifeline Types**

- Galvanized wire rope, 3/16 inch (5mm) dia.  
4,200 lb. (18.7 Kn) tensile strength min.
- Stainless steel wire rope, 3/16 inch (5mm) dia.  
3,700 lb. (16.4 Kn) tensile strength min.
- Nylon web, 1 inch (25mm) width  
5,000 lb. (22.2 Kn) tensile strength min.
- Vectran synthetic rope, 1/4 inch (6.3mm) dia.  
6,375 lb. (28.3 Kn) tensile strength min.
- Leading Edge SRL, 7/32 inch galvanized steel



© 2007 Capital Safety Note: Not all models available with lifeline materials shown above

---

---

---

---

---

---

---

---

---

---


---

---

**capital SAFETY** **Ultra-Lok® SRL** **SALA PROTECTA**

**Bracket Compatible**

- Ultra-Lok® cable and synthetic rope models compatible with anchor brackets:
  - 2105682 swiveling style roof anchor
  - 2105500 concrete leading edge tripod
  - 2105683 wood or metal decking anchor
  - 2103675 standing seam roof anchor
- Ultra-Lok® web models compatible with order picker cab mount brackets:
  - 3100231 cab mount bracket



© 2007 Capital Safety Note: Not all Ultra-Lok® models compatible with above anchors

---

---

---

---

---

---

---

---

---

---


---

---

**capital SAFETY** **Talon® SRL options** **SALA PROTECTA**

**Available in several configurations**

- Single leg 8 ft and 16 ft
- Twin Leg 6 ft on each leg, operates independently
- Single Leg Tie-back, 9.5 ft
- Twin Leg Tie-back, 7.5 ft

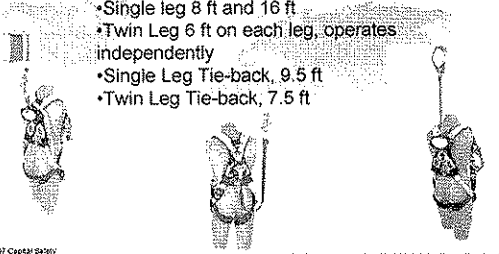

© 2007 Capital Safety

---

---

---

---

---

---

---

---

---


---

---

---

**capital** **Sealed SRL** **SALA PROTECTA**

- Sealed SRL's incorporate a revolutionary patented concept
- Available in Galvanized or Stainless Steel. Synthetic rope optional.
- With and Without Retrieval options
- With and Without rigid mount brackets for attachment to tripods, davit arms and other structures

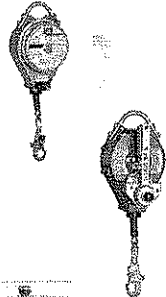

© 2007 Capital Safety

---

---

---

---

---


---

---

---

**capital** **Sealed SRL** **SALA PROTECTA**

- Sealed SRL's incorporate a revolutionary patented concept that separates all dynamic components, including the motor spring and brake, from foreign elements such as grease, moisture and dirt.
  - Contaminants on cable stay isolated from critical working components such as brake, retraction spring and energy absorbing features

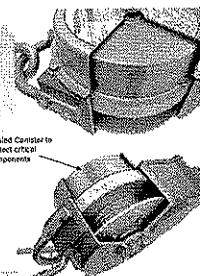

Sealed Cover to protect critical components

© 2007 Capital Safety

---

---

---

---

---


---

---

---

**capital** **Sealed-Blok™ SRL** **SALA PROTECTA**

- New sealed design keeps the critical working components (brake, power spring, & energy absorber) free of dirt, grease, water & chemicals
- Built in carrying handle makes transport and anchoring safe & easy. Also provides a secondary "dropped objects protection" attachment point.
- Large pivoting anchorage stays in line with load for added security & allow for use of a variety of connecting hardware
- Anti-ratcheting brake stops falls within inches and limits arresting forces to 900 lbs
- Cast aluminum housing & heavy gauge steel end-plates resist damage & provide corrosion resistance.
- Optional retrieval models available for emergency raising & lowering capabilities



30 ft. Model

© 2007 Capital Safety

---

---

---

---

---

---

---


---

**capital SAFETY** **Protecta Rebel®** **SALA PROTECTA**

- Lightweight and compact aluminum housing construction weighing only 2.8 lbs. (11 ft.)
- Best lifeline length-to-weight ratio in the industry
- Unique super strength thin webbing for total security and added length in a compact SRL
- Unique speed sensing brake reduces clearance requirements and limits fall arrest forces to 900 lbs. or less
- Designed for smooth consistent operation
- A1565A snap hook on lifeline, A1514A carabiner on housing
- Two year warranty, no recertification necessary

11 ft. and 20 ft. models

© 2007 Capital Safety




---

---

---

---

---

---

---

---

---

---


---

---

**capital SAFETY** **Protecta JRG SRL** **SALA PROTECTA**

- Lightweight & compact, ideal for almost any working environment
- Provides an economical SRL without compromising performance or safety
- Models available with 15 ft, 30 ft, 50 ft, 66 ft and 100 ft of galvanized cable
- Corrosion resistance zinc coated internal provide a longer service life
- Quick-activating two-pawl braking system limits free falls and arrest forces for added safety
- 2 year warranty on parts and workmanship plus, no re-certification required

© 2007 Capital Safety




---

---

---

---

---

---

---

---


---

---

---

---

**capital SAFETY** **Netting** **SALA PROTECTA**

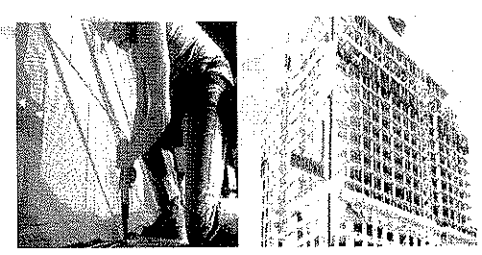

© 2007 Capital Safety

---

---

---

---

---

---

---


---

---

---

---

---

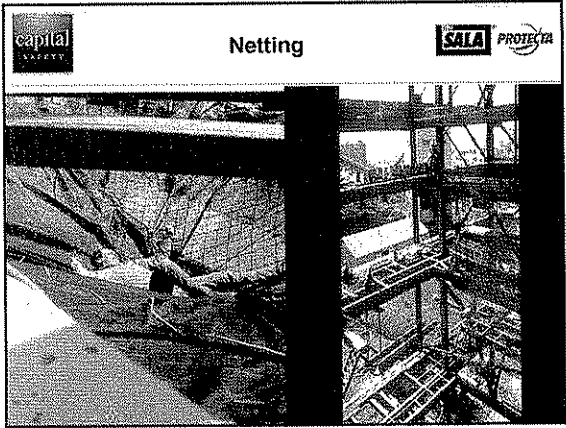

Netting



---

---

---


---

---

---

---

---

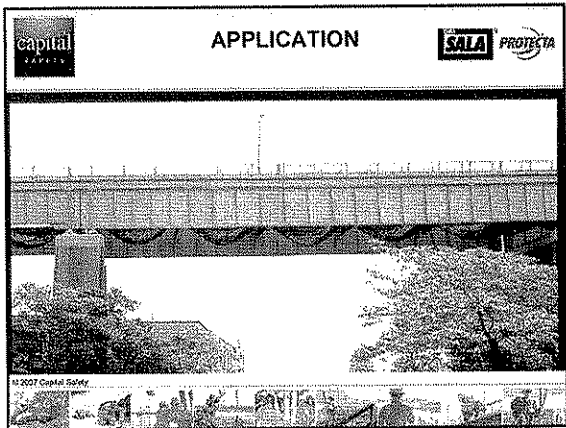

APPLICATION



© 2007 Capital Safety

---

---

---


---

---

---

---

---

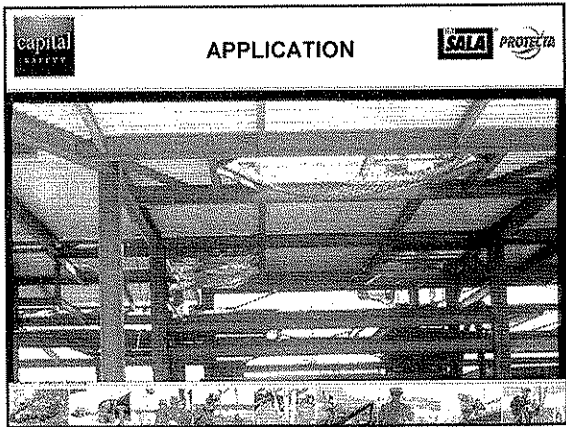

APPLICATION



---

---

---


---

---

---

---

---

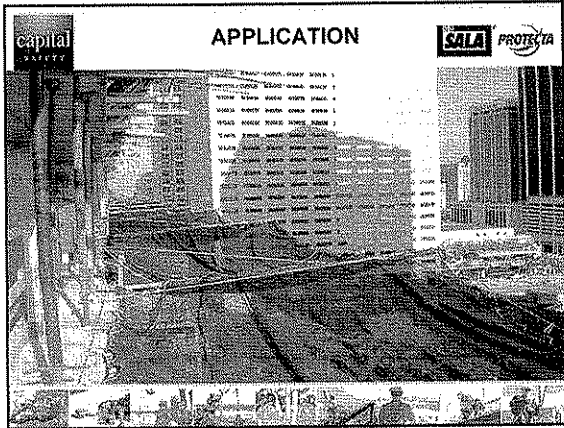


---

---

---

---

---

---

---

---

**capital SAFETY** **APPLICATION** **SALA PROTECTA**

### Training Requirements

**The Program**

- (b)(1) - The employer must provide a training program for each employee who might be exposed to fall hazards.
- The program shall enable each employee to recognize the hazards of falling and shall train each employee in the procedures to be followed in order to minimize these hazards.
- (b)(2)(i) the employer shall ensure that each employee is trained by a competent person in the correct procedures for erecting, maintaining, disassembling, and inspecting the fall protection systems to be used.
- (b)(2)(ii) Certification of training must be kept and refresher training done when the workplace changes, new systems used, and/or the worker does not display adequate knowledge of the fall protection systems.

**Inspection and Maintenance**

OSHA 1926.502 (b) (2)(i): Personal fall arrest systems shall be inspected prior to each use for wear, damage and other deterioration, and defective components shall be removed from service.

© 2007 Capital Safety

---

---

---

---

---

---

---

---

**capital SAFETY** **APPLICATION** **SALA PROTECTA**

### Training Requirements

- Competent Person** - One who is capable of identifying existing and predictable hazards in the surroundings or working conditions which are unsanitary, hazardous, or dangerous to employees, and who has authorization to take prompt corrective measures to eliminate them.
- Qualified Person** - One who, by possession of a recognized degree, certificate or professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated his ability to solve or resolve problems relating to the subject matter, the work, or the project.

© 2007 Capital Safety

---

---

---

---

---

---

---

---

Fall Protection Enters the Information Age 

Introducing



**iSAFE™**  
INTELLIGENT SAFETY SYSTEM

Combining RFID-enabled fall protection equipment  
with web-based information...to simplify  
**SAFETY, COMPLIANCE, PRODUCTIVITY**  
and **COST CONTROL**

2

---

---

---


---

---

---


---

---

What are the Components of the i-Safe System? 

The i-Safe intelligent technology consists of:

- Passive RFID tags (transponders)...
- That can be scanned by PDA readers (receivers)...
- That synchronize data with a web-enabled information portal.



5

---

---

---



---

---


---

---

---

 New i-Safe PDA 

- More Durable
- More Rugged
- More Memory
- Trade-In Program



© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY SALVA PROTECTA

New Developments

# CONNECTORS

© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY SALVA PROTECTA

What is ANSI Z359.1?

- National standard for fall arrest equipment
- Originally published in 1992 and revised in 1999
- Covers requirements for fall arrest equipment including harnesses, lifelines, lanyards, energy absorbers and anchorage connectors
- General industry standard
  - Does not apply to construction industry
- Standard is divided into 8 sections
  - Scope, Purpose, Application, Exceptions and Interpretations
  - Definitions
  - Requirements
  - Testing
  - Marking and instructions
  - User Inspection, Maintenance and Storage of Equipment
  - Equipment, Selection, Rigging, Use and Training
  - References

© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY SALVA PROTECTA

Proposed Changes to ANSI Z359.1

- Expansion of standard to become 'family of standards'
- Proposed sections
  - **Z359.0** Definitions and Terminology Used for Fall Protection and Fall Arrest
  - **Z359.1** Safety Requirements for Personal Fall Arrest Systems, Subsystems and Components
  - **Z359.2** Minimum Requirements for a Comprehensive Managed Fall Protection Program
  - **Z359.3** Safety Requirements for Positioning and Travel Restraint Systems
  - **Z359.4** Safety Requirements for Assisted-Rescue and Self-Rescue Systems, Subsystems and Components

© 2007 Capital Safety

---

---

---

---

---

---


---

---



**capital SAFETY** **ANSI Z359.1 (Continued)** **SALA PROTECTA**

- Front-mounted D-ring element on harnesses can now be used for fall arrest
  - Maximum free-fall distance must be limited to two feet and maximum arrest force to 900 pounds
  - The current standard only allows the frontal D-ring to be used for ladder climbing, fall restraint and work positioning

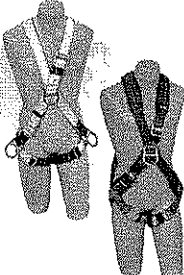

© 2007 Capital Safety

---

---

---

---

---


---

---

---

**capital SAFETY** **ANSI Z359.1 (Continued)** **SALA PROTECTA**

- Twin-leg lanyards now addressed in standard
  - Must have a minimum of 5,000 pounds breaking strength
  - Must be marked with several warnings:
    - Connect only the center snaphook to the fall arrest attachment element
    - Do not attach the leg of the lanyard which is not in use to the harness except to attachment points specifically designated by the manufacturer for this purpose
    - Do not rig the lanyard to create more than a six foot free-fall
    - Do not allow the legs of the lanyard to pass under arms, between legs or around the neck



© 2007 Capital Safety

---

---

---

---

---


---

---

---

**capital SAFETY** **ANSI Z359.1 (Continued)** **SALA PROTECTA**

- Anchorage load has changed from "3,600 pounds when certification exists" to "two times the maximum arrest force permitted on the system when certification exists"
- Additions to the Equipment Rigging and Use section include requirements that harnesses and fall arrest systems be selected and properly sized for the user and connectors, snaphooks and carabiners must be compatible with the equipment they are used with
- Additions to the Training section include provisions that training address how to select, inspect and use fall protection equipment; training methods and language, and assessments of trainers
- Editorial revisions:
  - The term "user" has been clarified with the terms "competent person," "qualified person" and "authorized person"



© 2007 Capital Safety

---

---

---

---

---

---


---

---

**capital SAFETY** **ANSI Z359.2 (Continued)** **SALA PROTECTA**

- Duties and responsibilities are laid out for each person associated with the comprehensive fall protection program
  - Employer
  - Program Administrator
  - Qualified Person
  - Competent Person
  - Authorized Person
  - Competent Rescuer
  - Authorized Rescuer
  - Qualified Person Trainer
  - Competent Person Trainer
  - Competent Rescuer Trainer

© 2007 Capital Safety




---

---

---

---

---

---

---

---


---

---

**capital SAFETY** **ANSI Z359.2 (Continued)** **SALA PROTECTA**

- Anchorage systems
  - Fall arrest anchorages must withstand a static load of 5,000 pounds for non-certified anchorages or two-times the maximum arresting force for certified anchorages
  - For work positioning systems, anchorages must withstand a static load of 3,000 pounds for non-certified anchorages or two-times the foreseeable force for certified anchorages
  - For travel restraint systems, anchorages must withstand a static load of 1,000 pounds for non-certified anchorages or two-times the foreseeable force for certified anchorages
  - For horizontal lifeline systems, anchorages must withstand at least two-times the maximum tension developed in the lifeline during fall arrest in the direction applied by the lifeline forces
  - Anchorages for rescue systems must withstand a static load of 3,000 pounds for non-certified anchorages or five-times the applied load for certified anchorages

© 2007 Capital Safety




---

---

---

---

---

---

---

---


---

---

**capital SAFETY** **ANSI Z359.2 (Continued)** **SALA PROTECTA**

- Inspections
  - Daily inspections of fall protection equipment and anchorages by the authorized person, or user of the equipment, as well as yearly inspection by a qualified person, competent person or competent rescuer are required
  - Items to verify include:
    - Presence and legibility of markings and tags
    - Presence of all integral components of the equipment
    - Absence of defects and damage

© 2007 Capital Safety

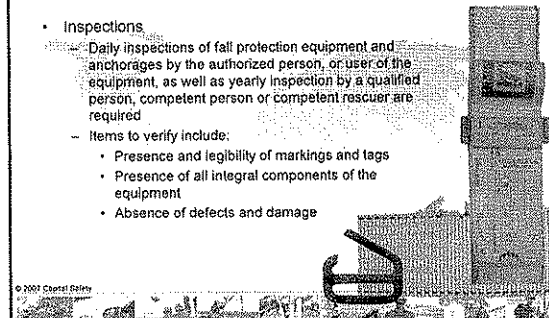


---

---

---

---

---

---

---

---


---

---

**capital SAFETY** **ANSI Z359.4 (Continued)** **SALA PROTECTA**

- Methods for equipment testing and training
- Requirements for inspection, maintenance and storage
  - Equipment must be inspected prior to each use and on an annual basis by a competent person
- Requirements for marking and instructions
  - Markings generally include
    - Part number, model and year of manufacture
    - Manufacturer's identification and contact information
    - Capacity range
    - Indication of compliance with the standard
    - Warning to follow manufacturer's instructions and inspection guidelines
    - Additional markings could include rope length, donning instructions, hazards to avoid, coupling methods, size and fibers used

© 2007 Capital Safety




---

---

---

---

---

---

---

---


---

---

**capital SAFETY** **Values of Expanded Fall Protection Standard** **SALA PROTECTA**

- Provides guidance in creating fall protection programs
  - Clear lines of authority and responsibility
  - Detailed job planning and expanded training
- Broadens scope of standard, additional work tasks and equipment types
  - Work positioning and travel restraint
  - Rescue and rope access
- Improves strength and performance of fall protection equipment
  - Increased snaphook & carabiner gate strength
  - Additional testing for twin leg lanyards
  - Establishes requirements for positioning, restraint and rescue equipment
- May increase compliance and reduce number of accidents
  - Protects worker from potential mis-use reducing risk and liability
  - Hook changes reduce the chance of forced "roll-out" for added safety

© 2007 Capital Safety




---

---

---

---

---

---

---

---


---

---

**capital SAFETY** **ANSI Family of Standards Schedule for Release** **SALA PROTECTA**

- Public comment period has closed. Committee will meet in late-April to resolve comments
- Estimated publication in June
- Provisions of Z359.1 dealing with gate strength will likely take effect in June at time of publication

© 2007 Capital Safety




---

---

---

---

---

---

---

---

---

---


capital SAFETY

**New Developments**

**Connectors**

SALA PROTECTA

- **Comaptibility Issue**
- **5000 lb gate on hooks and tiebacks**
- **13,000 lb. webbing**

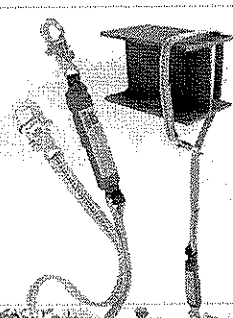

© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY

**New Developments**


SALA PROTECTA

## RESCUE

D – Descent and Rescue 1926.502 and 1910.66

The Employer shall provide for *prompt rescue* of employees in the event of a fall or shall assure that employees are able to rescue themselves

Suspension Trauma – “Key Issue”



© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY

**Key Questions in Rescue**

SALA PROTECTA

- How long of a duration is prompt?
- Does the “rescuer” need to be tied off properly while performing a rescue or does the rescue just need to be “prompt”.

© 2007 Capital Safety

---

---

---

---

---


---

---

---

capital SAFETY      Emergency Egress Systems      SALA PROTECTA

Safer than Geronimos



© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY      SALA PROTECTA

Horizontal Lifeline Systems

Addressing the Misinformation and / or Confusion

© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY      Horizontal Lifeline Systems      SALA PROTECTA

Lets start with some true and false questions.

1. All anchorage points for HLLs need to meet 5,000 lbs.
2. A system can be rated for more than two users?
3. A competent person can design a HLL system?
4. The horizontal forces are the same as the vertical forces imposed on the user?
5. I always need an inline shock absorber on my HLL system.

© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY


Horizontal Lifeline System  
Definition?

SALA PROTECTA

- Definition of a Qualified Person

Means one who, by possession of a recognized degree, certificate, or by professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated his/her ability to solve or resolve problems relating to the subject matter, the work, or the project.

© 2007 Capital Safety




---

---

---

---

---

---

---

---

capital SAFETY

Horizontal Lifeline System  
Standards


SALA PROTECTA

- What do they really mean?

- OSHA states that any HLL shall be designed, installed, and used under the supervision of qualified person, as part of a complete personal fall arrest system, which maintains a safety factor of at least two or 2 to 1 safety factor.

- Do I have a "qualified person" on my staff?
- 5,000 lb rule does not apply
- Loads have to be known every time the system is installed.

© 2007 Capital Safety




---

---

---

---

---

---

---

---

capital SAFETY


Horizontal Lifeline System  
HLL Loads

SALA PROTECTA

- HLL Loads, how do they work?

- HLLs may depending on their geometry and angle of sag, be subjected to greater loads than the impact load imposed by an attached component. When the angle of a HLL sag is less than 30 degrees, the impact force imparted to the lifeline by an attached lanyard is greatly amplified. For example, with a sag angle of 15 degrees, the force amplification is about 2:1 and at 5 degrees sag it is about 6:1

© 2007 Capital Safety




---

---

---

---

---

---

---

---

capital SAFETY

Horizontal Lifeline System  
HLL Loads

SALA PROTECTA

- HLL Loads, how do they work, cont?
  - HLL end loads are dependent on vertical force, span, pretension in the cable and also cable elasticity.

© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY

Horizontal Lifeline System  
HLL Loads

SALA PROTECTA

- HLL Loads, how do they work, cont?
  - For example, you are designing a two user system and you are utilizing 900 lb arresting force lanyards. Assume that your pretension yields a 10 degree vertical deflection during a maximum arresting force. The result is an end load amplification 2.9 times the arresting force or  $(900 \text{ lbs} \times 2 \text{ users} \times 2.9) = 5,220 \text{ lbs}$ . Your end anchors or stanchions have to be designed for 10,440 lbs applying the OSHA standard of 2:1.

© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY

Horizontal Lifeline System  
HLL Loads

SALA PROTECTA

- HLL Loads, how do they work, cont?
  - For example, you are designing a two user system and you are utilizing 900 lb arresting force lanyards. Assume that your pretension yields a 5 degree vertical deflection during a maximum arresting force. The result is an end load amplification 5.7 times the arresting force or  $(900 \text{ lbs} \times 2 \text{ users} \times 5.7) = 10,260 \text{ lbs}$ . Your end anchors or stanchions have to be designed for 20,520 lbs applying the OSHA standard of 2:1.

© 2007 Capital Safety

---

---

---

---

---

---


---

---



**capital SAFETY**      **Horizontal Lifeline System**      **SALA PROTECTA**  
**Pre-Engineered HLLs**

- **SecuraSpan System**
  - Attaches to I-beams ranging from 6" to 36" wide and up to 3-3/8" thick.
  - Long systems available, up to 60 ft spans with bypass brackets.
  - Lightweight and easy to use
  - Fully tested to OSHA requirements



© 2007 Capital Safety

---

---

---

---

---


---

---

---

**capital SAFETY**      **Horizontal Lifeline System**      **SALA PROTECTA**  
**Pre-Engineered HLLs**

- **Concrete IronWing System**
  - Attaches to 3/8" to 3/4" rebar or 3/4" shear studs
  - Long systems available, up to 60 ft spans with bypass brackets.
  - Fully tested to OSHA requirements

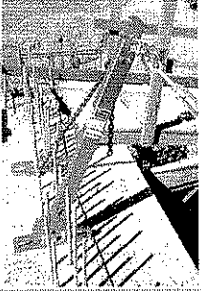

© 2007 Capital Safety

---

---

---

---

---


---

---

---

**capital SAFETY**      **Horizontal Lifeline System**      **SALA PROTECTA**  
**Pre-Engineered HLLs**

- **Pour in-Place SecuraSpan System**
  - Stanchions are mounted into pockets in the concrete
  - Stanchions are 6'-6" tall when mounted
  - Long systems available, up to 60 ft spans with bypass brackets.
  - Fully tested to OSHA requirements



© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital  
SAIA PROTECTA

**Engineered Systems**

---

---

---

---

---

---

---

---

CUSTOM SOLUTIONS

**We are the experts in Climbing & Access**

---

---

---

---

---

---

---

---

CUSTOM SOLUTIONS

**Tri-Arc Manufacturing Co.**

- Leading manufacturer of climbing & access products in the United States
- 50+ years of experience
- Active role in ANSI standards development
- Board of directors - American Ladder Inst.

---

---

---

---

---

---

---

---

**ARC**  
CUSTOM SOLUTIONS

**Devices Designed for Mines**

**SCISSOR TRUCK**  
The scissor truck is designed to transport heavy loads in a safe and secure manner. It features a scissor mechanism that allows the truck to be raised and lowered. The truck is equipped with a scissor lift that can be extended to reach heights of up to 20 feet. The truck is also equipped with a scissor lift that can be extended to reach heights of up to 20 feet.

**SCISSOR LIFT**  
The scissor lift is designed to provide a safe and secure platform for workers. It features a scissor mechanism that allows the lift to be raised and lowered. The lift is equipped with a scissor lift that can be extended to reach heights of up to 20 feet. The lift is also equipped with a scissor lift that can be extended to reach heights of up to 20 feet.

---

---

---

---

---

---

---

---

capital SAFETY **SALA** PROTECTA

**Services and Support**

© 2007 Capital Safety

---

---

---

---

---

---

---

---

capital SAFETY **Demonstration & Support** **SALA** PROTECTA

**We can get a demonstration Trailer/Truck anywhere! Ask us Today!**

**Products are backed by "world-class" factory service and support!**

© 2007 Capital

---

---

---

---


---

---

---

---

**capital SAFETY** **Training Services** **SALA PROTECTA**



**In-House and On-Site Training**

- Professional trainers/professional facilities
- Comprehensive training programs for distributors and end users
- Training courses on a variety of fall protection and rescue topics
- Customized capabilities/in-house and on-site

---

---

---

---

---


---

---

---

**capital SAFETY** **Training Tools** **SALA PROTECTA**

**Thinking About Fall Protection:**  
Booklet and video give an overview of the fall protection basics that serve as the foundation of an effective fall protection program

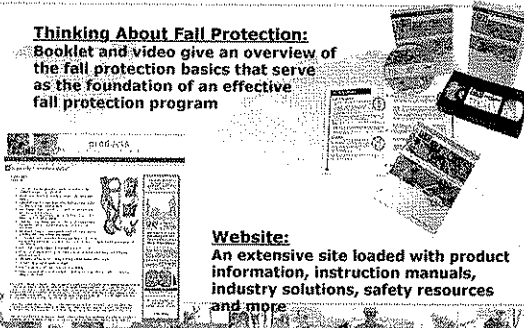

**Website:**  
An extensive site loaded with product information, instruction manuals, industry solutions, safety resources and more

---

---

---

---

---

---


---

---

**capital SAFETY** **SALA PROTECTA**

**THANK YOU**

© 2007 Capital Safety




---

---

---

---

---

---

---

---